

MINI

2008–14 Cooper Clubman

PRECAUTIONS

Warning: Batteries produce explosive gases that may cause personal injury. Do not expose the battery to flame or sparks. Always provide adequate ventilation. Do not smoke when working near batteries. Do not place tools or any similar object on the battery.

Warning: Do not allow any battery acid to come into contact with the eyes, the skin or clothing. Wear protective clothing, gloves and eye protection. Do not tilt the battery, or acid may leak from the vent hole.

Warning: If acid is splashed into the eyes, rinse them immediately for several minutes with clear water and consult a doctor immediately. Seek medical attention immediately if battery acid is accidentally swallowed. If acid is splashed onto the skin or clothing, neutralize it immediately with a soap solution and rinse with lots of water.

Warning: On vehicles equipped with Intelligent Battery Sensor (IBS), do not under any circumstances release socket-head cap screw of IBS. Do not establish any connection between the IBS and the sensor screw.

Warning: The IBS and wiring can be destroyed by mechanical strain during battery replacement. Do not use force when disconnecting the pole shoe from the battery terminal. Do not pull on the ground cable. Do not place any tools under the IBS to lever off the pole shoe. Do not use IBS connections as levers.

On vehicles with radio code, the radio code must be re-entered after disconnect-

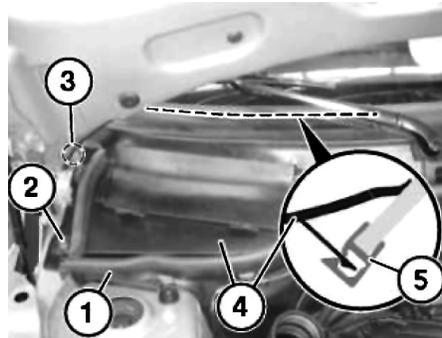


Fig. 1 Right cowl panel cover removal

ing the battery. Note stored stations and restore them after connecting the battery. Stored settings of the on-board computer and clock will also be lost. All available central keys must be re-coded for cars with first generation infrared transmitter locking systems. DTCs may be set in some control units after battery is connected.

BATTERY Removal

Disconnect battery ground cable first, followed by battery positive cable. Do not disconnect battery leads and leads from alternator and starter motor while engine is running.

1. Verify that ignition and all other electrical loads are "OFF."


2. Remove rubber seal (1), remove fasteners (2, 3), then unclip and remove righthand cowl panel cover (4), Fig. 1.
3. Disconnect battery ground cable (2), Fig. 2.
4. Disconnect battery positive cable (4), Fig. 2.
5. Detach battery vent hose (5), Fig. 2.
6. Remove mounting bolt (6) and battery retaining bracket, Fig. 2.
7. Remove battery.

Installation

Battery cables are routed through openings in the battery container cover. Install both battery leads so that they run at a 90° angle to the battery container.

When installing a new battery in vehicles equipped with Intelligent Battery Sensor (IBS), replacement battery information must be programmed into the vehicle data in accordance with specifications.

1. Reverse procedure to install, noting the following:
 - a. Make sure that battery clamps are correctly positioned on terminals when installed.
 - b. Connect battery positive cable first, then connect battery ground cable.
 - c. **Torque** battery cable clamp nuts to 44 inch lbs.
 - d. **Torque** battery retainer bracket mounting bolts to 53 inch lbs.
 - e. Install a suitably programmed scan tool, and follow manufacturer instructions to clear DTCs that may have been set when battery was disconnected.

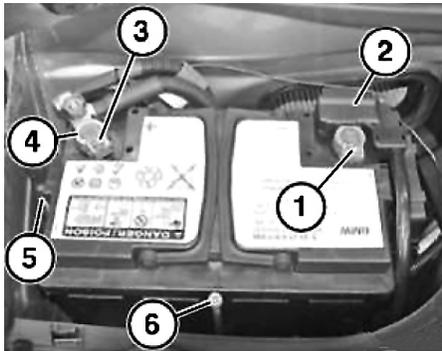

BTY120000000632

Fig. 2 Battery removal

The material herein may not be used without the prior express written permission of the copyright holder, including, but not limited to reproduction or transmission in any form by any means such as electronic, mechanical, photocopying, recording or otherwise; nor may it be stored on any retrieval system of any nature.

"The data reported herein has been compiled from authoritative sources. While every effort is made by the analysts to attain accuracy, manufacturing changes as well as typographical errors and omissions may occur on occasion. The publisher cannot be responsible nor does it assume any responsibility whatsoever for such omissions, errors or changes."

MOTOR INFORMATION SYSTEMS
MOTOR is a trademark of Hearst Business Media
A Unit of Hearst Corporation
1301 W. Long Lake, Suite 300
Troy, MI 48098

Copyright © 2015 Hearst Business Media. All rights reserved.
