

DODGE

2011-14 Journey

PRECAUTIONS

Warning: The battery is vented to release excess hydrogen gas that is created when the battery is being charged or discharged. However, even with these vents, hydrogen gas can collect in or around the battery. If hydrogen gas is exposed to flame or sparks, it may ignite. Do not smoke, use flame, or create sparks near the battery. Personal injury and vehicle damage may result. The battery contains sulfuric acid, which is poisonous and caustic. Avoid contact with skin, eyes, or clothing. In the event of contact, flush with water and call a physician immediately. Keep out of reach of children.

Warning: To protect hands from battery acid, a suitable pair of heavy duty rubber gloves, not the household type, should be worn when removing or servicing a battery. Safety glasses also should be worn. Remove metallic jewelry worn on hands or wrists to avoid injury by accidental arcing of battery current.

Warning: If the battery shows signs of freezing, leaking or loose posts, do not test, assist-boost, or charge. The battery may arc internally and explode. Personal injury and/or vehicle damage may result.

It is important that the battery, starting system, and charging system be thoroughly tested and inspected any time a battery needs to be charged or replaced. The cause of abnormal discharge, over charging or early battery failure must be corrected before a battery is replaced or returned to service.

The battery Group Size number, the Cold Cranking Amperage (CCA) rating, and the Reserve Capacity (RC) rating or

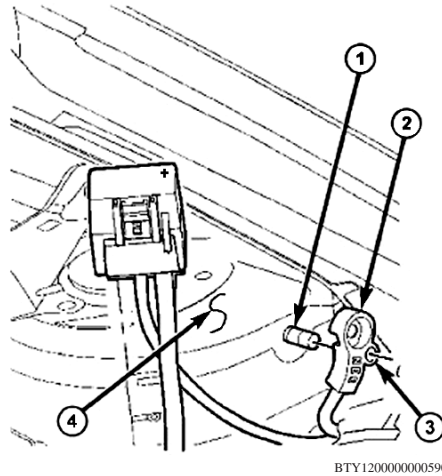


Fig. 1 Battery ground cable remote terminal location

Ampere-Hours (AH) rating can be found on the original equipment battery label. Be certain that a replacement battery has the correct Group Size number, as well as CCA and RC or AH ratings that equal or exceed the original equipment specification for the vehicle being serviced.

BATTERY Removal

This vehicle is equipped with a single 12-volt battery. All of the components of the battery system are located in the front of the vehicle, just ahead of the lefthand front wheel and tire assembly.

The battery ground cable remote terminal must be disconnected and isolated from


the remote battery post prior to service of the vehicle electrical systems. The battery ground cable remote terminal can be isolated by using the supplied isolation hole in the terminal casing.

Driver side splash shield is a two piece assembly to enable easy access for battery removal.

1. Disconnect and isolate battery ground cable remote terminal (2) from remote battery post (1), **Fig. 1**.
2. Raise and support vehicle.
3. Remove lefthand front wheel and tire assembly.
4. Remove retainers and remove forward section of front fender wheelhouse splash shield, **Fig. 2**.
5. Remove mounting nut, and position battery hold down bracket to one side.
6. Remove battery ground cable first, then remove positive cable from battery.
7. Remove battery from vehicle.

Installation

1. Position battery in battery tray.
2. Connect battery positive cable first, then battery ground cable to battery. **Torque** battery cable clamp nut to 145 inch lbs.
3. Position battery hold down bracket and install bracket nut. **Torque** bracket nut to 142 inch lbs.
4. Install forward section of front fender wheelhouse splash shield.
5. Install lefthand front wheel and tire assembly.
6. Lower vehicle.
7. Connect battery ground cable remote terminal (2) from remote battery post (1), **Fig. 1**. **Torque** battery cable clamp nut to 45 inch lbs.

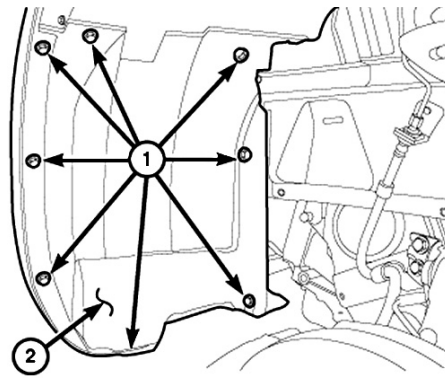

BTY120000000593

Fig. 2 Front fender wheelhouse splash shield removal

The material herein may not be used without the prior express written permission of the copyright holder, including, but not limited to reproduction or transmission in any form by any means such as electronic, mechanical, photocopying, recording or otherwise; nor may it be stored on any retrieval system of any nature.

"The data reported herein has been compiled from authoritative sources. While every effort is made by the analysts to attain accuracy, manufacturing changes as well as typographical errors and omissions may occur on occasion. The publisher cannot be responsible nor does it assume any responsibility whatsoever for such omissions, errors or changes."

"Portions of materials contained herein have been reprinted under license from Chrysler Group LLC, License Agreement CS13310.

MOTOR INFORMATION SYSTEMS
MOTOR is a trademark of Hearst Business Media
A Unit of Hearst Corporation
1301 W. Long Lake, Suite 300
Troy, MI 48098

Copyright © 2015 Hearst Business Media. All rights reserved.
